

AudioControl[®]

Making Good Sound Great™

♪ THE PERFECT AMPLIFIER
AND DAC IN ONE ♪



♪ **Rialto 600™**



HIGH POWER AUDIOPHILE AMPLIFIER
WITH DAC AND PREAMP VOLUME CONTROL

HIGH POWER LEVELS - 100 WATTS PER CHANNEL INTO 8 OHMS ♪ 200 WATTS PER
CHANNEL INTO 4 OHMS ♪ CONTROL VIA IR & RS232 ♪ ACCUBASS ♪
MADE IN THE USA ♪ HIGH PERFORMANCE WOLFSON DAC ♪ COMPACT SIZE ♪
SELECTABLE DIGITAL & ANALOG INPUTS ♪ SOURCE SWITCHING

HOME AUDIO


COMPACT LOCAL ZONE AMPLIFIER & DAC

AudioControl's Rialto 600 is the ultimate zone amplifier that combines a high performance Wolfson DAC with preamp volume control. The Rialto 600 dramatically improves the audio quality across all local audio zones. A perfect companion to streaming audio systems, video displays with digital outputs as well as powering speaker set-ups and all local audio needs in any audio zone. Powerful, audiophile quality, AccuBASS™, multiple digital and analog inputs and outputs all housed in a compact chassis made in the USA by AudioControl.

- High power amplifier at 100 watts per channel into 8 ohms
- Amplifier stable into 4 ohms at 200 watts per channel
- Wolfson DAC for audiophile quality and performance
- Multiple inputs for digital and analog sources
- Preamp volume control
- Perfect for gaming and portable media
- Ideal for streaming audio sources like SONOS
- Allows for additional local zone amplification needs
- AudioControl AccuBASS™ to maximize bass response
- 5-Way gold plated binding posts for optimal connection
- Small compact size at just 8.5"W x 5.4"D x 2.9"H

COMPACT LOCAL ZONE AMPLIFIER

FEATURE	SPECIFICATIONS
NUMBER OF CHANNELS	2
POWER RATING (ALL CHANNELS DRIVEN)	100 WATTS @ 8 OHMS 200 WATTS @ 4 OHMS
MINIMUM SPEAKER LOAD	4 OHMS
DIGITAL INPUTS	2X DIGITAL OPTICAL AND COAX
ANALOG INPUTS	1X STEREO, RCA, 1/8" ADAPTOR
SIGNAL TO NOISE RATIO	>95 dB
TOTAL HARMONIC DISTORTION	0.09%
MINIMUM VOLTAGE TO DRIVE TO FULL POWER	RCA INPUTS - .775 mVOLTS
DIGITAL AUDIO INPUTS 2 CHANNEL PCM	COAX - SPDIF 75 OHM OPTICAL - TOSLINK
CROSSOVER	HIGH-PASS, LO-PASS, OR BRIDGED 80 Hz 18dB OCTAVE
LINE VOLTAGE	100 - 120 VAC/200-240 VAC SWITCHABLE
POWER CONSUMPTION	TYPICAL LISTENING - 40 WATTS MAXIMUM - 520 WATTS
BASS ADJUSTMENT	ACCUBASS™
WEIGHT	4.5 POUNDS
FINISH OPTIONS	SATIN BLACK SIERRA WHITE
DIMENSIONS	8.5"Wx5.4"Dx2.9"H
COUNTRY OF ORIGIN	USA
LIMITED WARRANTY	5 YEARS
PATENT	PENDING

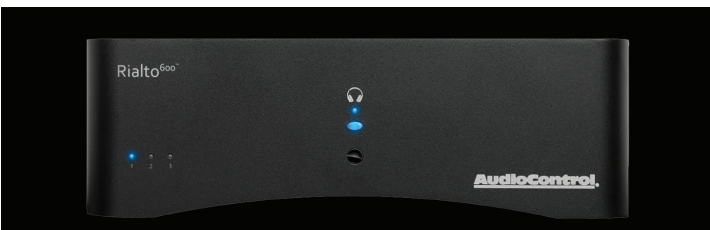

Contact AudioControl
22410 70th Avenue West
Seattle, WA 98043

Tel. 425-775-8461 | Fax 425-778-3166
sound.great@audiocontrol.com
www.audiocontrol.com



AudioControl®
Making Good Sound Great™

©2014. All rights reserved, AudioControl Inc.